



SUZUKI INSTRUMENTS

Think Reliability. Come To Us

Computerized Touch Screen Universal Testing Machines: UTES-TS



Plot No. A-803/804, Ajanta Ellora,
Navyug Nagar S. V. Road, Dahisar East,
Mumbai-400068, Maharashtra, India

E-MAIL : Suzuki.inst@gmail.com
<https://www.simaterialtestingservices.com>
M: 8169677956 / 9594084085



SUZUKI INSTRUMENTS

Think Reliability. Come To Us

Features :

- Loading accuracy as high as $\pm 1\%$
- Straining at variable speeds to suit a wide range of materials.
- Windows based touch screen control panel with printing connectivity.
- Motor driven threaded columns for quick effortless adjustment of lower cross-head-to facilitate rapid fixing of test specimen.
- Wide range of standard and special accessories.
- Easy change from plain to threaded and screwed specimens.
- Large effective clearance between columns enables testing of standards specimens as well as structures.
- Simple controls for ease of operation.
- Robust straining frame of an extremely rigid construction.
- Safe operation ensured by means of safety devices.
- Fully enclosed and protected pressure transducer.
- Manual control & release valve operation.
- Load Capacity : 100 kN, 200 kN, 400 kN, 600 kN, 1000 kN, 1200 kN, 1500 kN and 2000 kN.

Plot No. A-803/804, Ajanta Ellora,
Navyug Nagar S. V. Road, Dahisar East,
Mumbai-400068, Maharashtra, India

E-MAIL : Suzuki.inst@gmail.com
<https://www.simaterialtestingservices.com>
M: 8169677956 / 9594084085



SUZUKI INSTRUMENTS

Think Reliability. Come To Us

Straining unit :

This consists of a cylinder motor with chain and sprocket drive and a table coupled with the ram of the hydraulic cylinder, mounted on to a robust base. The cylinder and the ram are individually lapped to eliminate friction. The upper cross-head is rigidly fixed to the table by two strengthened columns.

The lower cross-head is connected to two screwed columns which are driven by a motor. Axial loading of the ram is ensured by relieving the cylinder and ram of any possible side loading by the provision of ball seating.

A rotary encoder of minimum resolution of 0.01mm, is provided to measure the deformation of the specimen.

Tension test is conducted by gripping the test specimen between the upper and lower cross-heads.

Compression, transverse, bending, shear and hardness tests are conducted between the lower cross-head and the table.

The lower cross-head can be raised or lowered rapidly by operating the screwed columns, thus facilitating ease of fixing of the test specimen.

Control Panel :

The Control Panel consists of a power pack complete with drive motor and an oil tank, control valves and electronic display unit.

Power Pack :

The power pack generates the maximum pressure of 200 kgf/cm². The hydraulic pump provides continuously non-pulsating oil flow. Hence the load application is very smooth.

Accuracy and Calibration :

Suzuki Electronic Universal testing machine is closely controlled for sensitivity, accuracy and calibration during every stage of manufacture. Machine is calibrated over each of its measuring range in accordance with the procedure laid down in IS 1828: Part1: 1991.

Suzuki Electronic Universal Testing Machine complies with Grade "A" of class 1 of IS-1828-Part1:1991

Plot No. A-803/804, Ajanta Ellora,
Navyug Nagar S. V. Road, Dahisar East,
Mumbai-400068, Maharashtra, India

E-MAIL : Suzuki.inst@gmail.com
<https://www.simaterialtestingservices.com>
M: 8169677956 / 9594084085



SUZUKI INSTRUMENTS

Think Reliability. Come To Us

Computerized Touch Screen Control Panel Series : S-UTES 2021-TS

Micro Controller based panel incorporating state of art technology with following features -

- Front panel touch screen display
- Data entry of test parameters including pre-load, rupture %, Safe Load & Specimen data etc.
- Online graph of load Vs Displacement directly on screen.
- USB Printer port for printer interface with graph & result print out.
- Facility to export the result/ Data to PDF, EXCEL & CSV formats.
- Windows based software available for Online graph on PC, Data analysis, Statistics, Point tracing, superimposing graphs to compare with standard, zooming graph etc.

Principle of Operation for – **Model: UTES-TS**

UTM right control valve is Servo Controlled in close loop mode as per mode selection. Following control modes available:

- 1) Standard Manual control
- 2) Load rate control
- 3) Elongation rate control
- 4) Load hold mode

Also Auto start, Potentiometric start & initial value open start options are available for test start to take care of slippage & different specimen types.

Load is applied by a hydrostatically lubricated ram.

Main cylinder pressure is transmitted to the pressure transducer housed in the control panel.

The transducer gives the signal to the electronic display unit, corresponding to the load exerted by the main ram.

Simultaneously the encoder fitted on the straining unit gives the mechanical displacement.

Plot No. A-803/804, Ajanta Ellora,
Navyug Nagar S. V. Road, Dahisar East,
Mumbai-400068, Maharashtra, India

E-MAIL : Suzuki.inst@gmail.com
<https://www.simaterialtestingservices.com>
M: 8169677956 / 9594084085



SUZUKI INSTRUMENTS

Think Reliability. Come To Us

Technical Specifications for - Servo Controlled Computerized Touch Screen Universal Testing Machines- Model: UTES-TS

MODEL	UNIT	UTES-TS100	UTES-TS200	UTES-TS400	UTES-TS600	UTES-TS1000	UTES-TS1200	UTES-TS1500	UTES-TS2000
Maximum Capacity	kN	100	200	400	600	1000	1200	1500	2000
Measuring range	kN	0-100	0-200	0-400	0-600	0-1000	0-1200	0-1500	0-2000
Load resolution (20000 counts full scale)	N	5	10	20	30	50	60	75	100
Load range with accuracy of Measurement +/- 1%	kN	2 to 100	4 to 200	8 to 400	12 to 600	20 to 1000	24-1200	30-1500	40-2000
Resolution of piston movement (Displacement)	mm	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Clearance for tensile test (At fully descended working piston)	mm	50-700	50-700	50-700	50-800	50-850	50-850	50-850	50-850
Clearance for compression test (At fully descended working piston)	mm	0-700	0-700	0-700	0-800	0-850	0-850	0-850	0-850
Clearance between columns	mm	500	500	500	600	750	750	750	750
Ram Stroke	mm	150	200	200	250	250	250	250	250
Straining/Piston Speed (at no load)	mm/min	0-300	0-150	0-150	0-100	0-80	0-65	0-50	0-45
CONNECTED LOAD									
Power	HP	1.33	1.33	2.33	2.5	3.5	3.5	5	6
V		400-440	400-440	400-440	400-440	400-440	400-440	400-440	400-440
		3	3	3	3	3	3	3	3
STANDARD ACCESSORIES									
FOR TENSION TEST									
Clamping jaws for round specimens of diameter	mm	10-20	10-20	10-25	10-25	10-25	10-25	10-25	10-25
		20-30	20-30	25-40	25-40	25-45	25-45	25-45	25-45
Clamping jaws for flat specimens of thickness	mm	0-10	0-10	0-15	0-15	0-22	0-20	0-20	0-20
		10-20	10-20	15-30	15-30	22-44	20-40	20-40	20-40
Width	mm	50	50	65	70	70	70	70	70
FOR COMPRESSION TEST									
Pair of Compression Plates of Dia.	mm	120	120	120	120	160	160	160	160
FOR TRANSVERSE TEST									
Table with adjustable rollers									
Width of rollers	mm	160	160	160	160	160	160	200	200
Diameter of Rollers	mm	30	30	30	50	50	50	50	50
Maximum clearance between supports	mm	500	500	500	600	800	800	800	800
Radius of punch tops	mm	6,12	6,12	12,16	16,22	16,22	16,22	16,22	16,22

Plot No. A-803/804, Ajanta Ellora,
Navyug Nagar S. V. Road, Dahisar East,
Mumbai-400068, Maharashtra, India

E-MAIL : Suzuki.inst@gmail.com
<https://www.simaterialtestingservices.com>
M: 8169677956 / 9594084085




SUZUKI INSTRUMENTS

Think Reliability. Come To Us


Home Screen




Graph of superimpose & Comparison

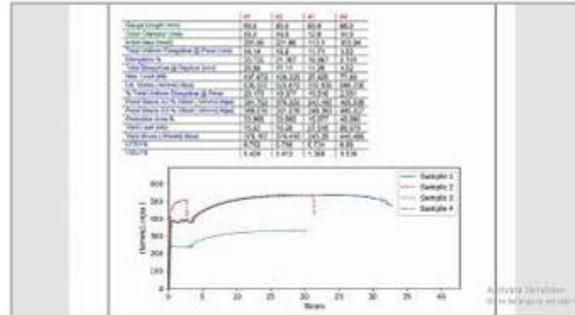

Real Time Graph

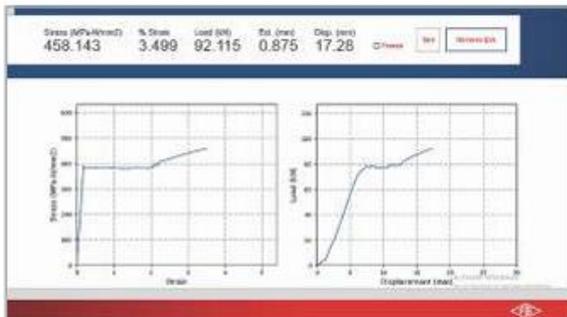

Point Tracing Zoom

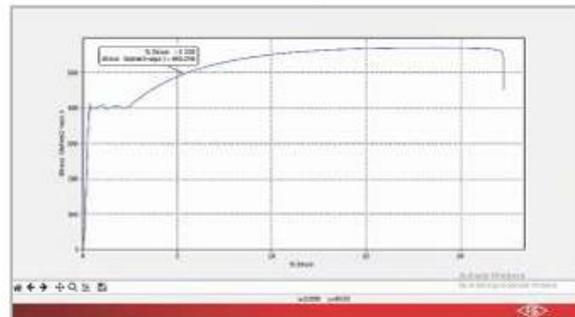

Batch Results

Results

Plot No. A-803/804, Ajanta Ellora,
Navyug Nagar S. V. Road, Dahisar East,
Mumbai-400068, Maharashtra, India

E-MAIL : Suzuki.inst@gmail.com
<https://www.simaterialtestingservices.com>
M: 8169677956 / 9594084085